
## 50x100 base extrusion type A01-2

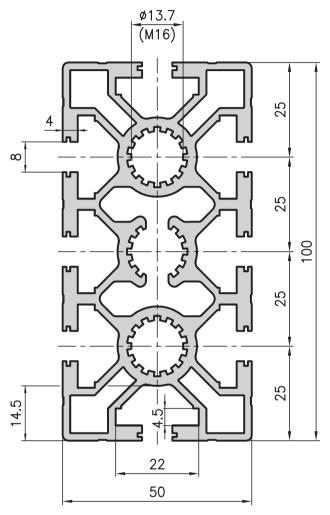


| Technical data     |   |                        |
|--------------------|---|------------------------|
|                    |   |                        |
| Ix                 | = | 149.84 cm <sup>4</sup> |
| Iy                 | = | 41.25 cm <sup>4</sup>  |
| Wx                 | = | 29.97 cm <sup>3</sup>  |
| Wy                 | = | 16.50 cm <sup>3</sup>  |
| Cross-section area | = | 16.84 cm <sup>2</sup>  |
| Weight             | = | 4.6 kg/m               |
|                    |   |                        |

| Order data  | Order number                   |
|---|--------------------------------|
| 50x100 base extrusion<br>Standard length 5000 mm<br>Standard length 6000 mm | A01-2-00/5000<br>A01-2-01/6000 |
| 50x100 base extrusion Cut to length   | A01-2-02-02/                   |
| Extra machining   | Pages 57-61                    |

## **Application**

This base extrusion is normally used for cross-beams. Further, its optimised cross section means that it is ideal for an extremely wide range of applications.





68 KANYA