AB Series Semi-Automatic Benchtop



- Single Pump with Fill Ranges up to 260mL
- Easy to Set-Up, Operate, Clean, and Changeover
- Accommodates Free-Flowing, Semi-Viscous, Viscous, Molten Products, and Product with Particulates
- Durable Stainless Steel Structure


AB Series Medium Duty Benchtop Filler

- Designs Available for OEM Applications
- CE Mark and Air Operated Designs Also Available
- Ability to Mix and Match Pumps and Nozzles for Optimal Versatility and Flexibility

Filamatic • A Division of National Instrument, LLC. • 4119 Fordleigh Road • Baltimore, MD 21215 1.866.258.1914 • info@filamatic.com • www.filamatic.com

AB Series Specifications

Model	Fill Stations	Volts	RPM	Fill Size
AB	1	110V or 220V	Up to 84	.05mL to 50mL
AB-5	1	110V or 220V	Up to 35	1mL to 130mL
AB-8	1	110V or 220V	Up to 23	1mL to 260mL
AB-A-8	1	17-18 scfm	Up to 16	1mL to 260mL

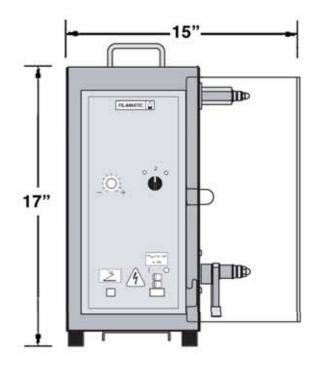

Additional AB Series Benchtop Features:

- ♦ Fill Accuracy +/- .5%
- Entry Level Filler Ideal for Start-Up Companies
- Product May Be Supplied from Floor Level, Overhead, or a Pressurized Source Depending on the Piston Pump Selected
- Ability to Fill a Wide Range of Containers such as Plastic and Glass Bottles, Pouches, Syringes, and Test Tubes
- Manufactured in the USA

Filamatic offers COMPLIMENTARY product testing and purchasing options including rentals, lease arrangements, and a "Try Before You Buy" program. For more information call 866.258.1914 or email info@filamatic.com.

