




30x30 face extrusion type B03-2



30x30 face extrusion with panel slots type B02–2

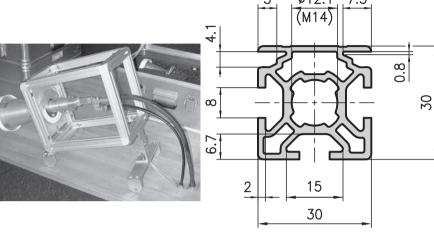




Application

For lightweight machine frames, protective guards, safety fencing, etc. Metal panelling sheets, as well as composite panels, acrylic glass panels and all-plastic panels up to 4 mm in thickness can be fixed in place into the panel slots on the face extrusions.





Technical data		
Ix	=	2.85 cm ⁴
Iy	=	2.83 cm ⁴
Wx	=	1.90 cm ³
Wy	=	1.83 cm ³
Cross-section area	=	3.10 cm^2
Weight	=	0.8 kg/m

Order data	Order number
30x30 face extrusion Standard length 5000 mm	B03-2-00/5000
30x30 face extrusion Cut to length	B03-2-02-02/
Extra machining	Pages 57-61

= 2.93 cm	14		
= 2.76 cm	14		
= 1.93 cm	13		
= 1.84 cm	13		
= 3.18 cm	12		
= 0.9 kg/r	n		
Order number	Order number		
	= 2.76 cm = 1.93 cm = 1.84 cm = 3.18 cm = 0.9 kg/r		

Weight	=	0.9 kg/m
Order data	Order	number
30x30 face enclosure extrusion Standard length 5000 mm	B02-2-	00/5000
30x30 face enclosure extrusion Cut to length	B02-2-	02–02/
Extra machining	Pages 5	57–61

KANYA 111