


Strut profile 30x30 2N

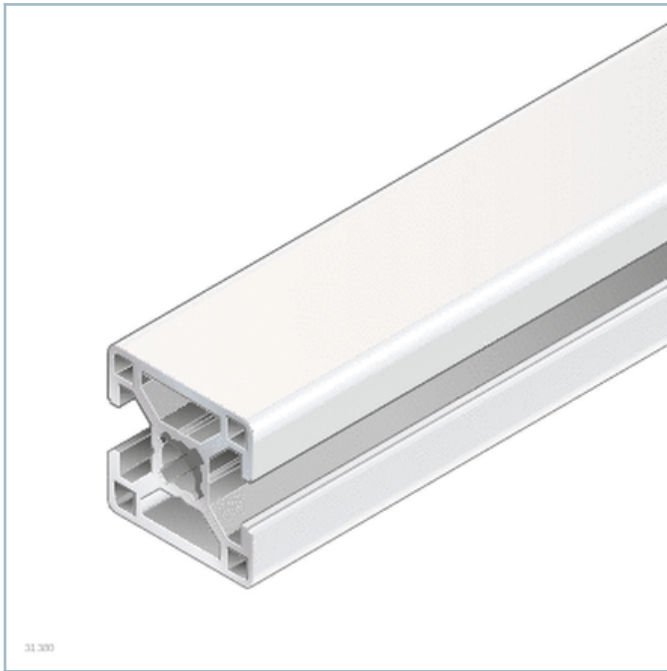

Product description

[Quick & Easy profile finishes](#)
[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)

Dimensions

Strut profile 30x30 2N

30x30 2N

A = 3,5 cm²

I_x = 2,8 cm⁴

I_y = 3,5 cm⁴

W_x = 2,1 cm³

W_y = 2,7 cm³


I_t = 1,5 cm⁴

W_t = 1,2 cm³

m = 1,0 kg/m

19180





Ordering codes

The following caps with holes are needed:

30x30 signal gray (1 item)

30x30 black (1 item)

The following cover caps are needed:

30x30 signal gray (1 item)

30x30 black (1 item)

	L			ESD	No.
	mm				
Strut profile 30x30 2N	50 ... 6070		1		3842992399
Strut profile 30x30 2N, 20xL=6070mm	6070	20			3842557220
Strut profile 30x30 2N Q&E	50 ... 6070		1		3842993705
Cover cap 30x30, signal gray			100		3842548744
Cover cap 30x30, black			20		3842548745
Cover cap with hole 30x30, signal gray			20		3842548774
Cover cap with hole 30x30, black			20		3842548775
Strut profile 30x30 2N	6070		1		3842557230

Standard profile finishing Lmax = 6000 mm (note minimum length)		M8 / D7.8 / D11 / DB11
Customized profile finishes (L _{max} = 4900 mm) ¹⁾		DI / DIS / MT / MTS / MI / MIS / DG

1) DG_{max} = 45°; L_{min1} / L_{min2} = 352 / 404 mm