
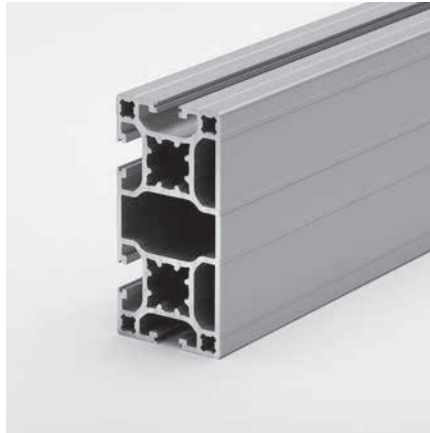


40x80 face extrusion type C01-5

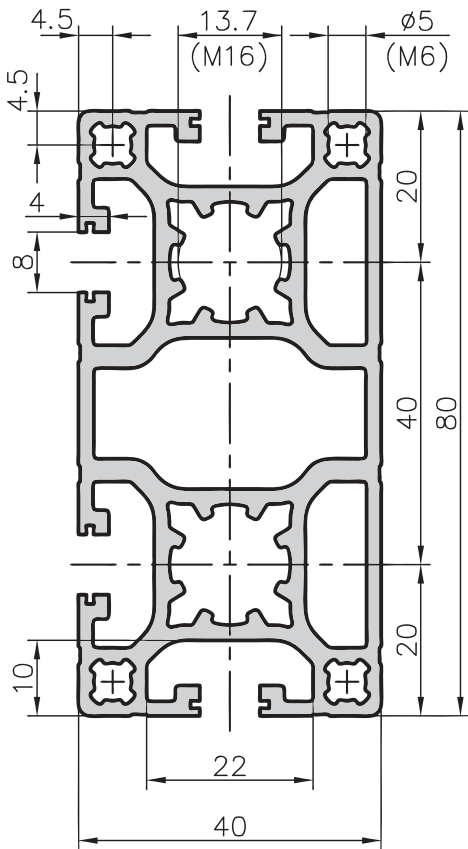

Application

Like all partially closed extrusions, this item is ideal if you want to keep your structure as clean as possible.

Technical data

I_x	=	64.40 cm ⁴
I_y	=	17.20 cm ⁴
W_x	=	16.10 cm ³
W_y	=	8.60 cm ³
Cross-section area	=	9.76 cm ²
Weight	=	2.6 kg/m

Order data **Order number**

40x80 face extrusion	
Standard length 5000 mm	C01-5-00/5000
40x80 face extrusion	
Cut to length	C01-5-02-02/...
Extra machining	Pages 57-61

Application

The light extrusion 40x120 with the rip off slots for use with the new connecting technology, PVS®-EASY, is a cost effective cross beam.

Technical data

I_x	=	203.49 cm ⁴
I_y	=	25.75 cm ⁴
W_x	=	33.91 cm ³
W_y	=	12.87 cm ³
Cross-section area	=	14.77 cm ²
Weight	=	3.99 kg/m

Order data **Order number**

40x120 light extrusion	
Standard length 5000 mm	C03-9-00/5000
40x120 light extrusion	
Cut to length	C03-9-02-02/...
Extra machining	Pages 57-61

40x120 light extrusion type C03-9

