



TOP LOAD MACHINE

ETL800 - ETL1000

Three-flap carton closing machine

- In-line machine with driven, vacuum supported belts
- Suitable for cartonboard and corrugate
- Stainless steel frame
- Hot melt gluing
- Integrated stainless steel electrical cabinet
- PLC control
- Touchscreen HMI

Power supply : 6,1 kW - 400 V (3 phase) - 50 Hz (ETL600)
17 kW - 400 V (3 phase) - 50 Hz (ETL800 & ETL1000)

IP classification: IP 54

Air consumption: 50 NI/min

Air supply: 5 - 10 bars

ETL800 & ETL1000 footprint: 1680 x 4055 x 1500 mm

Weight ETL800 & ETL1000 1400 kg

Multi-format machine: easy changeover via HMI touchscreen and handwheels




ETL800 speed: up to 80 boxes/min

ETL1000 speed: up to 150 boxes/min

Box dimensions:

- Length: 100 - 300 mm
- Width: 80 - 300 mm
- Height: 20 - 100 mm

Other formats on request

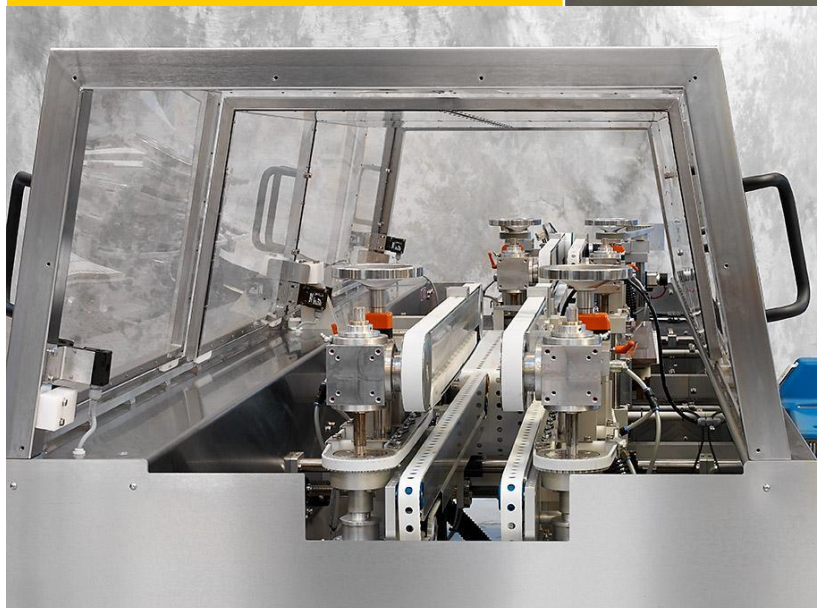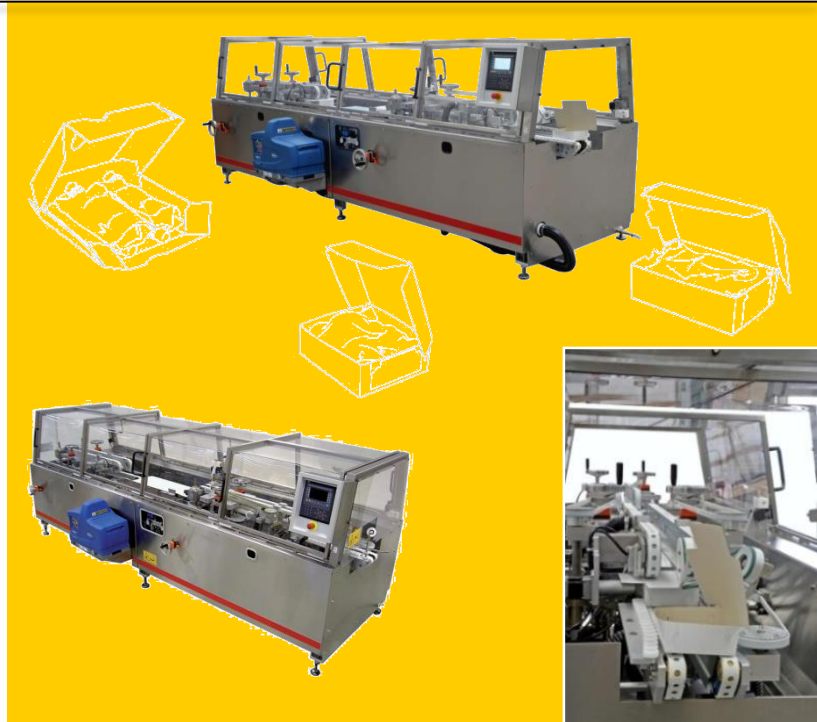

ETPACK SPRINTER
Emballage Technologies group
ZA de Troyalac'h – BP 80019- 29553 QUIMPER CEDEX 9 - France
+33 298 946 999
www.et-pack.com – contact@et-pack.com