


Strut profile 30x30 3N

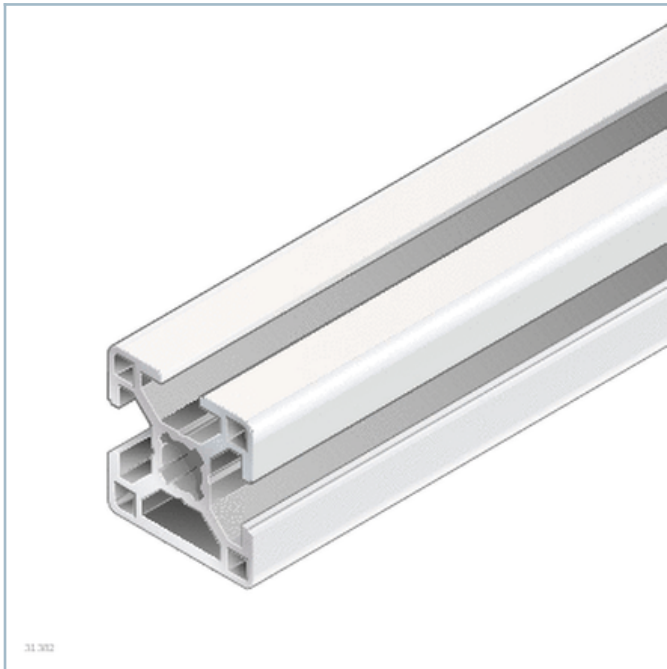

Product description

[Quick & Easy profile finishes](#)
[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)

Dimensions

Strut profile 30x30 3N

30x30 3N

A = 3,3 cm²

I_x = 3,1 cm⁴

I_y = 2,8 cm⁴

W_x = 2,3 cm³

W_y = 2,1 cm³


I_t = 0,86 cm⁴

W_t = 0,73 cm³

m = 0,9 kg/m

19182





Ordering codes

The following caps with holes are needed:

30x30 signal gray (1 item)

30x30 black (1 item)

The following cover caps are needed:

30x30 signal gray (1 item)

30x30 black (1 item)

	L			ESD	No.
	mm				
Strut profile 30x30 3N	50 ... 6070		1		3842992400
Strut profile 30x30 3N, 20xL=5600mm	5600	20			3842506951
Strut profile 30x30 3N Q&E	50 ... 6070		1		3842993707
Cover cap 30x30, signal gray			100		3842548744
Cover cap 30x30, black			20		3842548745
Cover cap with hole 30x30, signal gray			20		3842548774
Cover cap with hole 30x30, black			20		3842548775
Strut profile 30x30 3N	6070		1		3842557231

Quick&Easy profile finishes

Standard profile finishes (note minimum length)		M8 / D7.8 / D11 / DB11
Customized profile finishes ($L_{max} = 4900\text{ mm}$) ¹⁾		DI / DIS / MT / MTS / MI / MIS / DG

1) $DG_{max} = 45^\circ$; $L_{min1} / L_{min2} = 352 / 404\text{ mm}$