


Strut profile 40x120L

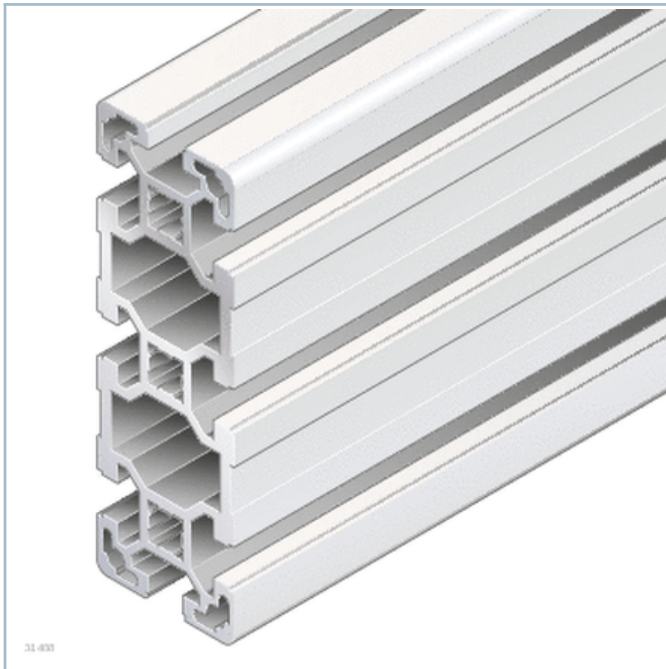

Product description

[Quick & Easy profile finishes](#)

[Introduction to strut profiles](#)

Technical data

[Quick & Easy profile finishes](#)


Dimensions

Strut profile 40x120L

40x120L

$A = 15,5 \text{ cm}^2$
 $I_x = 203,2 \text{ cm}^4$
 $I_y = 27,8 \text{ cm}^4$
 $W_x = 33,9 \text{ cm}^3$
 $W_y = 13,9 \text{ cm}^3$
 $I_t = 17,2 \text{ cm}^4$
 $W_t = 10,0 \text{ cm}^3$
 $m = 4,2 \text{ kg/m}$

19214

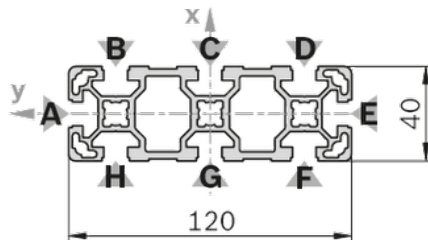

Ordering codes

The following cover caps are needed:

40x40 signal gray (1 item)

40x80 signal gray (1 item)

40x40 black (1 item)

40x80 black (1 item)

Note:

For the 40x120L profile you require the following combination of cover caps: 1x 40x40 and 1x 40x80

	L			ESD	No.
	mm				
Strut profile 40x120L	50 ... 6070		1		3842993139
Strut profile 40x120L M12/-	60 ... 6000		1		3842993140
Strut profile 40x120L M12/M12	110 ... 6000		1		3842993141
Strut profile 40x120L D17/D17	80 ... 6000		1		3842993142
Strut profile 40x120L D17V/D17V	90 ... 6000		1		3842993225
Strut profile 40x120L, 8xL=6070mm	6070	8			3842537824
Strut profile 40x120L Q&E	50 ... 6070		1		3842993716
Cover cap 40x40, signal gray			100		3842548746
Cover cap 40x40, black			20		3842548747

	L			ESD	No.
	mm				
Cover cap 40x80, signal gray			20		3842548748
Cover cap 40x80, black			20		3842548749
	6070		1		3842529344

Quick & Easy profile finishes

Standard profile finishes (note minimum length) ¹⁾	M12 / D9,8 (B,C,D,F,G,H) ¹⁾ / D17 (B,C,D,F,G,H) ¹⁾ / DB17 / F1 (A,E)
Customized profile finishes ($L_{\max} = 5400$ mm) ²⁾	DI / DIS / MT / MTS / MI / MIS / DG

1) For the specified slots

2) $DG_{\max} = 45^\circ$; $L_{\min1} / L_{\min2} = 439 / 578$ mm